

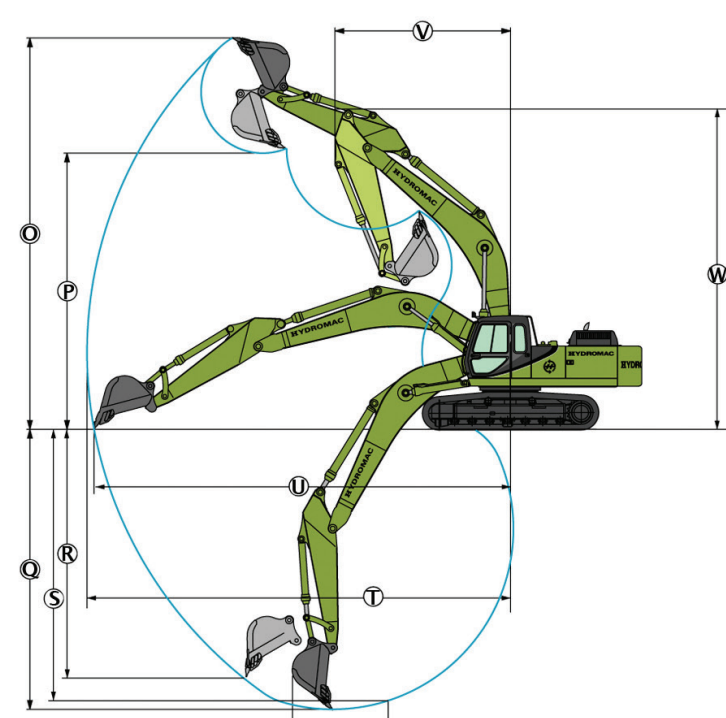


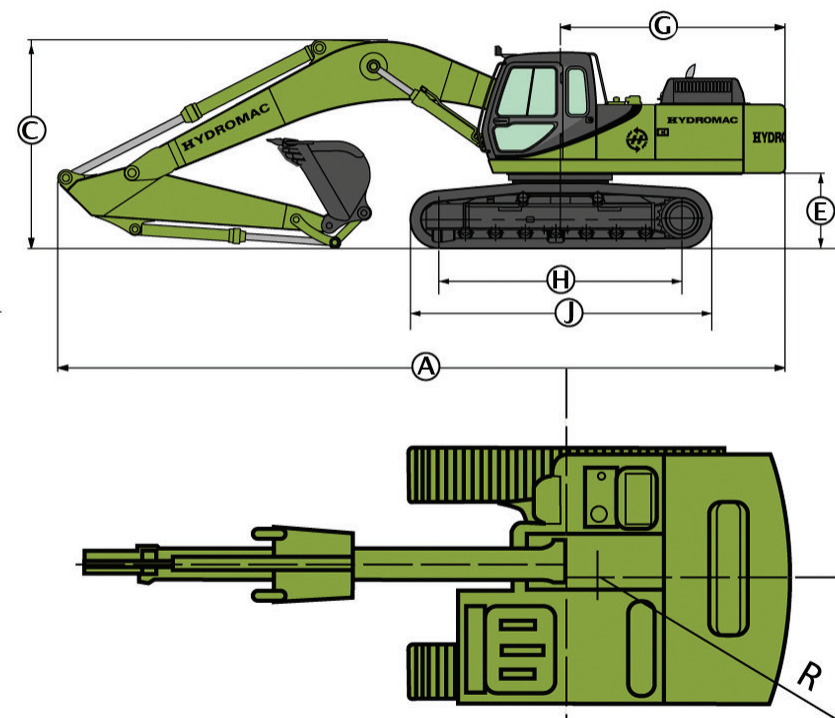

HIGH-EFFICIENCY
AND ECO-FRIENDLY
INGENIOUSLY
DESIGNED

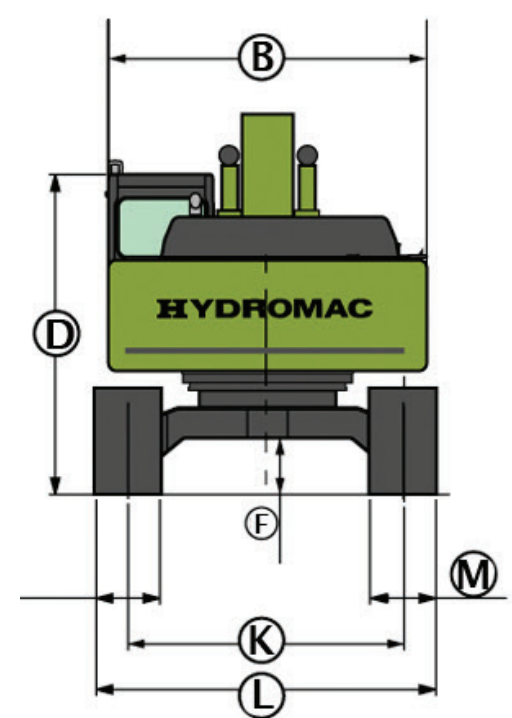

High-End Core Configuration

- Internationally renowned engine compliant with China National Stage III emission standards, offering energy-saving and fuel-efficient performance
- International brands main pump and main valve
- Global brands hydraulic components ensuring high hydraulic system reliability



Enhanced reliability and durability

- Robust, high-strength body
- Reinforced boom, arm, and bucket structures



Enhanced comfort and coordination

- High-rigidity, new cabin with quiet and comfortable design
- Color LCD monitor for easy monitoring and maintenance
- Multiple operation modes available



HYDROMAC | PRODUCT SPECIFICATION

PERFORMANCE PARAMETERS	Model H115-10
Weight (T)	15
Bucket capacity (m³)	0,60-0,75
Engine model	CUMMINS QSF3,8
Power (Kw/r/min)	86/2200
Fuel tank capacity (L)	247
Travel speed (Km/h)	5,3/3,1
Swing speed (r/min)	12
Climbing ability (%)	70
Bucket digging force (KN)	100
Arm length (mm)	2500
Boom length (mm)	4600
Ground pressure (Kpa)	39
Hydraulic oil tank capacity (L)	130

OVERALL DIMENSIONS	Model H115-10
A-Overall length (mm)	7740
B-Overall width (mm)	2490
C-Overall height (boom top)(mm)	2880
D-Overall height (cab top) (mm)	2830
E-Counterweight ground clearance (mm)	870
F-Minimun ground clearence (mm)	430
G-Tail swing radius (mm)	2315
H-Track ground lenght (mm)	3000
J-Track lenght (mm)	3735
K-Gauge (mm)	2000
L-Track width (mm)	2500
M-Track plate width (mm)	500
N-Swing platform width (mm)	2490

OPERATING RANGE	Model H115-10
O-Maximun digging height (mm)	8630
P-Maximun unloading height (mm)	6180
Q-Maximun digging depth (mm)	5500
R-Maximun vertical wall digging depth (mm)	4940
T-Maximun digging reach	8305
U-Maximun diggind reach at ground level (mm)	8180
V-Minimum swing radius (mm)	2495
W-Maximun height at minimun swing radius (mm)	6430
X-Distance form swing center to rear end (mm)	2155
Z-Counterweight height (mm)	1935
A1-Ground length (transportation) (mm)	4410

Note: Due to continuous technological improvements, parameters may vary without prior notice. Please refer to the actual sample machine for accurate specifications.

HYDROMAC
H115-10

HYDROMAC MAQUINAS S.A.

Add: Colectora Oeste N° 28.170 Don Torcuato, Buenos Aires, Argentina CP1611
Tel: +54 11 4748-3365 / 4748- 2395 ☎ +54 11 5813-5669
www.hydromac.com.ar info@hydromac.com.ar @hydromac_